

轮式割草机 割草机
WHEEL MOWER



性能特点 FEATURE

- ◆ 机动灵活、转向轻便，适合平整草坪快速修剪，维护简单且续航持久；
Flexible, easy steering, fast trimming for flat lawns, low maintenance & long endurance.
- ◆ 工业级履带，可攀爬 30° 坡度，复杂地形下性能出众；
Industrial-grade tracks support climbing up to 30° slopes with excellent performance on rough terrain.
- ◆ 360° 车身自由旋转，灵动机身为用户带来便利；
360° free rotation enables flexible operation for outdoor tasks.
- ◆ 遥控距离最远达1000米，配备紧急制动，杜绝刀片接触风险；
Max remote control range of 1000m; emergency stop fitted to avoid blade contact hazards.
- ◆ 配割草高度调节设备，能高效处理不同高度和密度的杂草。
Adjustable cutting height for efficient trimming of weeds of various sizes.

标准配置/STANDARD CONFIGURATION

标配c7 mini遥控器/润通225发动机
C7 Mini remote controller/Runlong 225 engine

选装配置/OPTIONAL CONFIGURATION

隆鑫196发动机/工业遥控器/防翻架/整车外围造型
Loncin 196 Engine/engine/industrial remote controller/anti-roll frame/full vehicle outer molding

适用范围 APPLICATION


适合农场、果园、球场、山地、绿化工程、开荒地等多种作业环境。
Suitable for farms, orchards, sports fields, mountainous areas, greening projects, wasteland reclamation and other working scenarios.

型号	轮式简易四驱
整机尺寸	890*770*470mm
包装尺寸	940*820*620mm
整机重量	98kg
包装重量	120kg
切割宽度	530mm
切割高度	4cm、6cm
升降方式	手动
行走速度	0-4km/h
电压电量	24V 12AH
启动方式	手拉/电启动
爬坡角度	30°
行走方式	四驱
行走电机	有刷
割刀	一字平刀
刀头数量	2
燃油	92以上汽油
遥控距离	≤200m
割草效率	2000m ² /h

Model	Wheel Mower
Overall Dimension	890*770*470mm
Packing Dimension	940*820*620mm
Net Weight	98kg
Gross Weight	120kg
Cutting Width	530mm
Cutting Height	4cm、6cm
Height Adjustment Mode	Manual
Travel Speed	0-4km/h
Battery Spec.	24V 12AH
Starting Method	Manual / Electric
Climbing Angle	30°
Travel Mode	4WD
Travel Motor	Brushed Motor
Mowing Blade	Straight Flat Blade
Blade Quantity	2
Fuel	≥92# Gasoline
Remote Control Range	≤200m
Mowing Capacity	2000m ² /h

燃油割草机 YM-550 无刷

GASOLINE LAWN MOWER



性能特点 FEATURE

- ◆ 底盘最低高度仅 10mm，机动性与离地间隙表现出色；
Minimum chassis clearance of only 10mm, delivering great mobility and ground passability.
- ◆ 工业级履带，可攀爬 45° 坡度，复杂地形下性能出众；
Industrial-grade tracks support climbing up to 45° slopes with excellent performance on rough terrain.
- ◆ 360° 车身自由旋转，灵动机身为用户带来便利；
360° free rotation enables flexible operation for outdoor tasks.
- ◆ 遥控距离最远达 1000 米，配备紧急制动，杜绝刀片接触风险；
Max remote control range of 1000m; emergency stop fitted to avoid blade contact hazards.
- ◆ 配割草高度调节设备，能高效处理不同高度和密度的杂草。
Adjustable cutting height for efficient trimming of weeds of various sizes.

标准配置/STANDARD CONFIGURATION

电启动发动机/遥控器启动/遥控器熄火/远程紧急停止(遥控器可升级为工业遥控器或 C7-plus 遥控器)

Electric start engine/Remote start/Remote shutoff/Remote emergency stop(The remote controller can be upgraded to industrial remote controller or C7-plus remote controller)

选装配置/OPTIONAL CONFIGURATION

有刷电机款：推铲/无刷电机款：推铲、置物架

Brushed motor version: Dozer blade/Brushless motor version: Dozer blade + storage rack

适用范围 APPLICATION

适合农场、果园、球场、山地、绿化工程、开荒地等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous areas, greening projects, wasteland reclamation and other working scenarios.

型号	YM-550 无刷
整机尺寸	900*950*535mm
包装尺寸	950*1010*685mm
整机重量	170kg
包装重量	200kg
切割宽度	500mm
切割高度	10-100mm
升降方式	遥控
行走速度	0-4km
电压电量	24V 12AH
启动方式	远程遥控启动、停止
爬坡角度	45°
标配动力	RV225
燃油箱容量	2L
油耗	1.2h/L
机油容量	0.6L
工作效率	20000m ² /h
遥控距离	≤1000m
可选属具	推铲、置物架

Model	YM-550
Overall Dimension	900*950*535
Packing Dimension	950*1010*685
Net Weight	170kg
Gross Weight	200kg
Cutting Width	500mm
Cutting Height	10-100mm
Height Adjustment Mode	Remote Control
Travel Speed	0-4km
Battery Spec.	24V 12AH
Starting Method	Remote start & stop
Climbing Angle	45°
Standard Engine	RV225
Fuel Tank Capacity	2L
Fuel Consumption	1.2h/L
Engine Oil Capacity	0.6L
Working Efficiency	20000m ² /h
Remote Control Range	≤1000m
Optional Attachments	Dozer blade/storage rack

燃油割草机 YM-550 有刷

GASOLINE LAWN MOWER



性能特点 FEATURE

- ◆ 底盘最低高度仅 10mm，机动性与离地间隙表现出色；
Minimum chassis clearance of only 10mm, delivering great mobility and ground passability.
- ◆ 工业级履带，可攀爬 45° 坡度，复杂地形下性能出众；
Industrial-grade tracks support climbing up to 45° slopes with excellent performance on rough terrain.
- ◆ 360° 车身自由旋转，灵动机身为用户户外工作带来便利；
360° free rotation enables flexible operation for outdoor tasks.
- ◆ 遥控距离最远达 1000 米，配备紧急制动，杜绝刀片接触风险；
Max remote control range of 1000m; emergency stop fitted to avoid blade contact hazards.
- ◆ 配割草高度调节设备，能高效处理不同高度和密度的杂草。
Adjustable cutting height for efficient trimming of weeds of various sizes.

标准配置/STANDARD CONFIGURATION

电启动发动机/遥控器启动/遥控器熄火/远程紧急停止(遥控器可升级为工业遥控器或 C7-plus 遥控器)

Electric start engine/Remote start/Remote shutoff/Remote emergency stop(The remote controller can be upgraded to industrial remote controller or C7-plus remote controller)

选装配置/OPTIONAL CONFIGURATION

有刷电机款：推铲/无刷电机款：推铲、置物架

Brushed motor version: Dozer blade/Brushless motor version: Dozer blade + storage rack

适用范围 APPLICATION

适合农场、果园、球场、山地、绿化工程、开荒地等多种作业环境。


Suitable for farms, orchards, sports fields, mountainous areas, greening projects, wasteland reclamation and other working scenarios.

型号	YM-550 有刷
整机尺寸	900*930*520
包装尺寸	950*990*670
整机重量	140kg
包装重量	170kg
切割宽度	500mm
切割高度	10-125mm
升降方式	遥控
行走速度	0-4km
电压电量	24V 12AH
启动方式	远程遥控启动、停止
爬坡角度	45°
标配动力	RV225
燃油箱容量	2L
油耗	1.2h/L
机油容量	0.6L
工作效率	20000m ² /h
遥控距离	≤1000m
可选属具	推铲

Model	YM-550
Overall Dimension	900*930*520
Packing Dimension	950*990*670
Net Weight	140kg
Gross Weight	170kg
Cutting Width	500mm
Cutting Height	10-125mm
Height Adjustment Mode	Remote Control
Travel Speed	0-4km
Battery Spec.	24V 12AH
Starting Method	Remote start & stop
Climbing Angle	45°
Standard Engine	RV225
Fuel Tank Capacity	2L
Fuel Consumption	1.2h/L
Engine Oil Capacity	0.6L
Working Efficiency	20000m ² /h
Remote Control Range	≤1000m
Optional Attachments	Dozer blade

锂电割草机 YM-550 有刷

ELECTRIC LAWN MOWER



性能特点 FEATURE

- ◆ 底盘最低高度仅 20mm，机动性与离地间隙表现出色；
Minimum chassis clearance of only 20mm, delivering great mobility and ground passability.
- ◆ 工业级履带，可攀爬 40°-45° 坡度，复杂地形下性能出众；
Industrial-grade tracks support climbing up to 40° -45° slopes with excellent performance on rough terrain.
- ◆ 360° 车身自由旋转，灵动机身户外工作带来便利；
360° free rotation enables flexible operation for outdoor tasks.
- ◆ 遥控距离最远达1000米，配备紧急制动，杜绝刀片接触风险；
Max remote control range of 1000m; emergency stop fitted to avoid blade contact hazards.
- ◆ 配割草高度调节设备，能高效处理不同高度和密度的杂草。
Adjustable cutting height for efficient trimming of weeds of various sizes.

标准配置/STANDARD CONFIGURATION

标配遥控器/工具箱/割刀一副/充电器一个

Standard accessories Remote controller/toolbox/one set of cutting blades/one charger

选装配置/OPTIONAL CONFIGURATION

有刷电机款：推铲/无刷电机款：推铲、置物架、48V-67AH加大电池

Brushed motor version: Dozer blade/Brushless motor version: Dozer blade、storage rack、Upgraded Large Battery

适用范围 APPLICATION

适合农场、果园、球场、山地、绿化工程、开荒地等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous areas, greening projects, wasteland reclamation and other working scenarios.

型号	YM-550有刷
整机尺寸	970*840*450mm
包装尺寸	1100*910*610mm
整机重量	110kg
包装重量	140kg
切割宽度	530mm
切割高度	20-70mm
升降方式	遥控
行走速度	0-4km
电压电量	48V-40Ah
启动方式	远程遥控启动、停止
爬坡角度	45°
电机功率	48V 350W*2
电池重量	15.5kg
行走电机转速	75r/min
割草电机转速	2000W 4000r/min
工作效率	20000m ² /h
遥控距离	≤200m
工作时长	2-3h (根据使用场景)

Model	YM-550
Overall Dimension	970*840*450mm
Packing Dimension	1100*910*610mm
Net Weight	110kg
Gross Weight	140kg
Cutting Width	530mm
Cutting Height	20-70mm
Height Adjustment Mode	Remote Control
Travel Speed	0-4km
Battery Spec.	48V 40AH
Starting Method	Remote start & stop
Climbing Angle	45°
Motor Power	48V 350W*2
Battery Weight	15.5kg
Travel Motor Speed	75r/min
Cutting Motor Speed	2000W 4000r/min
Working Efficiency	20000m ² /h
Remote Control Range	≤200m
Working Duration	2-3 hours (varies with working conditions)

锂电割草机 YM-550 无刷

ELECTRIC LAWN MOWER



性能特点 FEATURE

- ◆ 底盘最低高度仅 20mm，机动性与离地间隙表现出色；
Minimum chassis clearance of only 20mm, delivering great mobility and ground passability.
- ◆ 工业级履带，可攀爬 40°-45° 坡度，复杂地形下性能出众；
Industrial-grade tracks support climbing up to 40° -45° slopes with excellent performance on rough terrain.
- ◆ 360° 车身自由旋转，灵动机身为用户户外工作带来便利；
360° free rotation enables flexible operation for outdoor tasks.
- ◆ 遥控距离最远达1000米，配备紧急制动，杜绝刀片接触风险；
Max remote control range of 1000m; emergency stop fitted to avoid blade contact hazards.
- ◆ 配割草高度调节设备，能高效处理不同高度和密度的杂草。
Adjustable cutting height for efficient trimming of weeds of various sizes.

标准配置/STANDARD CONFIGURATION

标配遥控器/工具箱/割刀一副/充电器一个

Standard accessories Remote controller/toolbox/one set of cutting blades/one charger

选装配置/OPTIONAL CONFIGURATION

有刷电机款：推铲/无刷电机款：推铲、置物架、48V-67AH加大电池

Brushed motor version: Dozer blade/Brushless motor version: Dozer blade、storage rack、Upgraded Large Battery

适用范围 APPLICATION

适合农场、果园、球场、山地、绿化工程、开荒地等多种作业环境。



Suitable for farms, orchards, sports fields, mountainous areas, greening projects, wasteland reclamation and other working scenarios.

型号	YM-550无刷
整机尺寸	900*960*460mm
包装尺寸	1000*1000*610mm
整机重量	160kg
包装重量	190kg
切割宽度	530mm
切割高度	20-70mm
升降方式	遥控
行走速度	0-3km
电压电量	48V-40Ah
启动方式	远程遥控启动、停止
爬坡角度	45°
电机功率	48V 500W*2
电池重量	15.5kg
行走电机转速	75r/min
割草电机转速	2000W 4000r/min
工作效率	20000m ² /h
遥控距离	≤200m
工作时长	2-3h (根据使用场景)

Model	YM-550
Overall Dimension	900*960*460mm
Packing Dimension	1000*1000*610mm
Net Weight	160kg
Gross Weight	190kg
Cutting Width	530mm
Cutting Height	20-70mm
Height Adjustment Mode	Remote Control
Travel Speed	0-3km
Battery Spec.	48V 40AH
Starting Method	Remote start & stop
Climbing Angle	45°
Motor Power	48V 500W*2
Battery Weight	15.5kg
Travel Motor Speed	75r/min
Cutting Motor Speed	2000W 4000r/min
Working Efficiency	20000m ² /h
Remote Control Range	≤200m
Working Duration	2-3 hours (varies with working conditions)

燃油割草机 坦克 (800/1000)

ELECTRIC LAWN MOWER

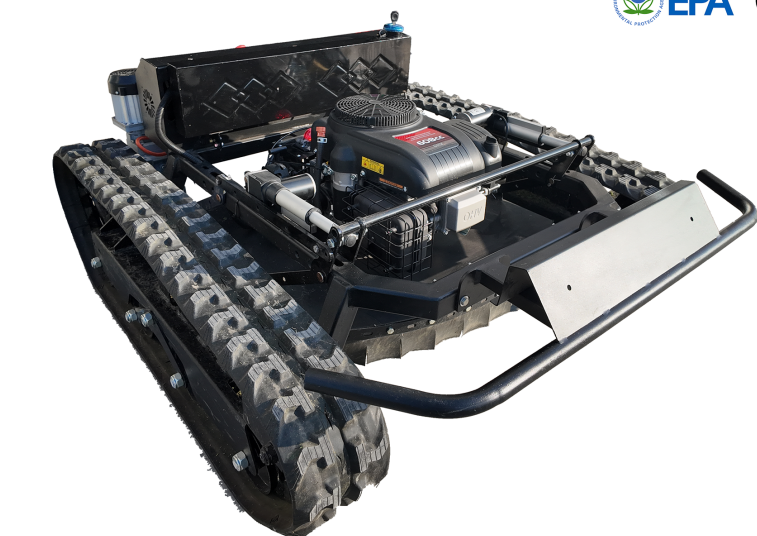

性能特点 FEATURE

- ◆ 底盘最低高度仅 10mm，机动性与离地间隙表现出色；
Minimum chassis clearance of only 10mm, delivering great mobility and ground passability.
- ◆ 工业级履带，可攀爬 50° 坡度，复杂地形下性能出众；
Industrial-grade tracks support climbing up to 50° slopes with excellent performance on rough terrain.
- ◆ 360° 车身自由旋转，灵动机身为用户户外工作带来便利；
360° free rotation enables flexible operation for outdoor tasks.
- ◆ 遥控距离最远达1000米，配备紧急制动，杜绝刀片接触风险；
Max remote control range of 1000m; emergency stop fitted to avoid blade contact hazards.
- ◆ 配割草高度调节设备，能高效处理不同高度和密度的杂草。
Adjustable cutting height for efficient trimming of weeds of various sizes.

标准配置/STANDARD CONFIGURATION

电启动发动机、遥控器启动、遥控器熄火、远程紧急停止(遥控器可升级为工业遥控器或C7-plus遥控器)

Electric start engine/Remote start/Remote shutdown/Remote emergency stop (Upgradeable to industrial remote or C7-plus remote)

选装配置/OPTIONAL CONFIGURATION

推雪铲/打药机/机罩/运输平台/侧割台/48V定制

Snow Plow / Sprayer / Engine Cover / Transport Platform / Side Cutting Deck / Custom 48V

适用范围 APPLICATION

适合农场、果园、球场、山地、绿化工程、开荒地等多种作业环境。


Suitable for farms, orchards, sports fields, mountainous areas, greening projects, wasteland reclamation and other working scenarios.

型号	坦克800/1000
整机尺寸(800/1000)	1450*1330*700/ /1550*1530*700
包装尺寸(800/1000)	1500*1420*880/ /1600*1620*880
整机重量(800/1000)	300kg/340kg
包装重量(800/1000)	360kg/400kg
切割宽度	800mm/1000mm
切割高度(有刷/无刷)	10-200mm
升降方式	遥控
行走速度	0-6km/h
电压电量	24V-12Ah
启动方式	远程遥控启动、停止
爬坡角度	50°
标配动力	隆鑫 608cc
系统/控制器	自发电系统 分控电路控制器
燃油箱容量	9L
额定功率	11.5kW/3600rpm
燃油消耗	≤370g/kW·h
遥控距离	≤1000m
工作时长	3-5h (根据使用场景)

Model	TK800/1000
Overall Dimension (Brushed / Brushless)	1450*1330*700/ /1550*1530*700
Packing Dimension (Brushed / Brushless)	1500*1420*880/ /1600*1620*880
Net Weight (Brushed / Brushless)	300kg/340kg
Gross Weight (Brushed / Brushless)	360kg/400kg
Cutting Width	800mm/1000mm
Cutting Height (Brushed / Brushless)	10-200mm
Height Adjustment Mode	Remote Control
Travel Speed	0-6km/h
Battery Spec.	24V-12Ah
Starting Method	Remote start & stop
Climbing Angle	50°
Standard Power	Loncin 608cc
System / Controller	Self-generating System Split Circuit Controller
Fuel Tank Cap.	9L
rated power	2000W 4000r/min
fuel consumption	20000m ³ /h
Remote Control Range	≤1000m
Working Duration	3-5 hours (varies with working conditions)

遥控开荒机 开荒机

BRUSH CUTTER

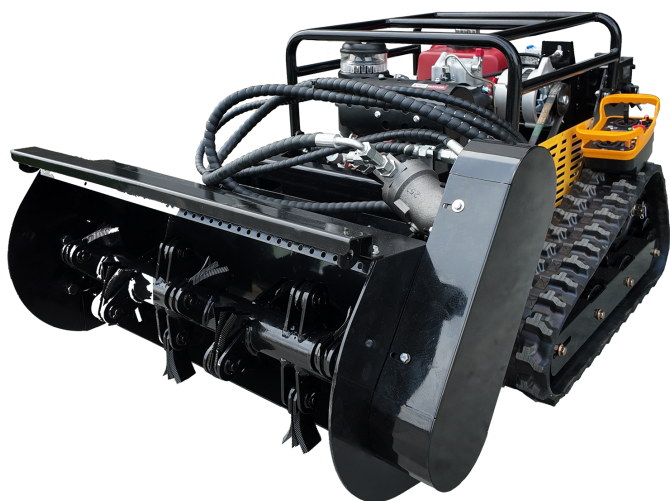

性能特点 FEATURE

- ◆ 底盘最低高度0mm，机动性与离地间隙表现出色；
Minimum chassis clearance of 0mm, delivering great mobility and ground passability.
- ◆ 工业级履带，可攀爬 35° 坡度，复杂地形下性能出众；
Industrial-grade tracks support climbing up to 35° slopes with excellent performance on rough terrain.
- ◆ 360° 车身自由旋转，灵动机身为用户户外工作带来便利；
360° free rotation enables flexible operation for outdoor tasks.
- ◆ 高性能柴油动力搭配双无刷电机，电启动告别手拉费力；
High-power diesel with dual brushless motors, electric start easy operation.
- ◆ 配割草高度调节设备，能高效处理不同高度和密度的杂草。
Adjustable cutting height for efficient trimming of weeds of various sizes.

标准配置/STANDARD CONFIGURATION

标配科普柴油195发动机/遥控升降/电启动/标配割灌机属具/工具箱/割刀一副/充电器一个

Standard equipped with Kepu 195 diesel engine/remote control lifting/electric start/standard brush cutter attachments/toolbox/one set of cutting blades/one charger.

选装配置/OPTIONAL CONFIGURATION

选配C7-PLUS遥控器/加购抛雪机属具

Optional C7-PLUS remote controller/Snow Thrower Attachment (Extra Cost)

适用范围 APPLICATION

适合农场、果园、球场、山地、绿化工程、开荒地等多种作业环境。


Suitable for farms, orchards, sports fields, mountainous areas, greening projects, wasteland reclamation and other working scenarios.

型号	开荒机
整机尺寸	1580*870*700mm
包装尺寸	1630*920*850mm
整机重量	360kg
包装重量	410kg
切割宽度	800mm
切割高度	0-350mm
升降方式	遥控
行走速度	0-4km/h
主轴转速	3600rpm
启动方式	电启动
爬坡角度	≤35°
电机功率	650*2纯铜无刷电机
燃油箱容量	5L
油耗	1.1L/H
机油容量	1.2-1.5L
机油类型	四冲程柴油机油
遥控距离	≤1000m
电压电量	48v

Model	Brush Cutter
Overall Dimension	1580*870*700mm
Packing Dimension	1630*920*850mm
Net Weight	360kg
Gross Weight	410kg
Cutting Width	800mm
Cutting Height	0-350mm
Height Adjustment Mode	Remote Control
Travel Speed	0-4km/h
spindle speed	3600rpm
Starting Method	Electric Start
Climbing Angle	≤35°
Motor Power	650*2 Pure Copper Brushless Motor
Fuel Tank Capacity	5L
Fuel Consumption	1.1L/H
Engine Oil Capacity	1.2-1.5L
Oil Type	Four-stroke diesel engine oil
Remote Control Range	≤1000m
Voltage & Battery Capacity	48v

遥控割灌机 割灌机 柴油

REMOTE BRUSH CUTTER

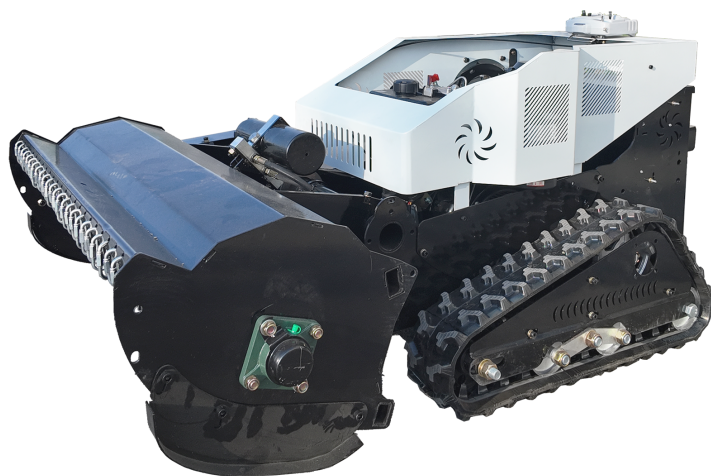

性能特点 FEATURE

- ◆ 底盘最低高度仅 10mm，机动性与离地间隙表现出色；
Minimum chassis clearance of only 10mm, delivering great mobility and ground passability.
- ◆ 工业级履带，可攀爬 55° 坡度，复杂地形下性能出众；
Industrial-grade tracks support climbing up to 55° slopes with excellent performance on rough terrain.
- ◆ 360° 车身自由旋转，灵动机身为用户户外工作带来便利；
360° free rotation enables flexible operation for outdoor tasks.
- ◆ 高性能柴油动力搭配双无刷电机，电启动告别手拉费力；
High-power diesel with dual brushless motors, electric start easy operation.
- ◆ 配割草高度调节设备，能高效处理不同高度和密度的杂草。
Adjustable cutting height for efficient trimming of weeds of various sizes.

标准配置/STANDARD CONFIGURATION

科普195电启/遥控升降/标配遥控器/工具箱/割刀一副/充电器一个

Kepu 195/Electric Start/Remote Controlled Lifting/Remote Controller Included as Standard/Tool kit/one set of blades/one charger

选装配置/OPTIONAL CONFIGURATION

选配C7-PLUS遥控器/可勒195F发动机

Optional C7-PLUS remote controller/Kepu 195F engine

适用范围 APPLICATION

适合农场、果园、球场、山地、绿化工程、开荒地等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous areas, greening projects, wasteland reclamation and other working scenarios.

型号	遥控柴油割灌机 (800/1000)
整机尺寸(800/1000)	1470*970*670/ /1470*1170*670
包装尺寸(800/1000)	1580*1170*800/ /1590*1270*800
整机重量(800/1000)	322kg/351kg
包装重量(800/1000)	362kg/398kg
切割宽度(800/1000)	850/1050mm
切割高度	10-220mm
升降方式	遥控
履带宽度	15cm*2条
主轴转速	3600rpm
启动方式	电启动
爬坡角度	≤55°
电机功率	650*2纯铜无刷电机
燃油箱容量	5L
油耗	1.1L/H
机油容量	1.2-1.5L
机油类型	四冲程柴油机油
遥控距离	≤1000m
刀片数量	60片 (20组*3=60)

Model	Remote Diesel Brush Cutter
Overall Dimension (800/1000)	1470*970*670/ /1470*1170*670
Packing Dimension (800/1000)	1580*1170*800/ /1590*1270*800
Net Weight (800/1000)	322kg/351kg
Gross Weight	362kg/398kg
Cutting Width (800/1000)	850/1050mm
Cutting Height	10-220mm
Height Adjustment Mode	Remote Control
Track Width	15cm × 2 pieces
spindle speed	3600rpm
Starting Method	Electric Start
Climbing Angle	≤55°
Motor Power	650*2 Pure Copper Brushless Motor
Fuel Tank Capacity	5L
Fuel Consumption	1.1L/H
Engine Oil Capacity	1.2-1.5L
Oil Type	Four-stroke diesel engine oil
Remote Control Range	≤1000m
Blades	60 pcs (20 sets × 3 = 60)

遥控割灌机 割灌机

REMOTE BRUSH CUTTER



性能特点 FEATURE

- ◆ 底盘最低高度仅 20mm，机动性与离地间隙表现出色；
Minimum chassis clearance of only 20mm, delivering great mobility and ground passability.
- ◆ 工业级履带，可攀爬 55° 坡度，复杂地形下性能出众；
Industrial-grade tracks support climbing up to 55° slopes with excellent performance on rough terrain.
- ◆ 360° 车身自由旋转，灵动机身为用户户外工作带来便利；
360° free rotation enables flexible operation for outdoor tasks.
- ◆ 割草宽度可选 800/1000/1200mm，留茬高度 20-200mm 可调，遥控液压升降操作省心；
Cutting width 800/1000/1200mm; stubble height 20-200mm adjustable, remote hydraulic lift easy use.
- ◆ 分控电路控制器 + 电启动，标配挡草帘，机身结构稳固，维护方便，长期作业更耐用。
Separate circuit controller & electric start, standard grass baffle, solid frame, easy maintenance, durable for long-hour work.

标准配置/STANDARD CONFIGURATION

科普柴油192发动机/遥控升降/电启动/挡草帘/c7 mini遥控器

192 diesel engine/Remote lifting/Electric start/Grass baffle/C7 Mini remote controller

选装配置/OPTIONAL CONFIGURATION

可改为手动升降

Manual lifting available

适用范围 APPLICATION

适合农场、果园、球场、山地、绿化工程、开荒地等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous areas, greening projects, wasteland reclamation and other working scenarios.

型号	遥控割灌机 (800/1000/1200)
整机尺寸(cm) (800/1000/1200)	156*102*97/156*117*98/ 156*102*97
包装尺寸(cm) (800/1000/1200)	163*104*103/163*143*103/ 163*104*103
整机重量 (800/1000/1200)	320kg/348kg/365kg
包装重量 (800/1000/1200)	350kg/378kg/395kg
切割宽度(cm) (800/1000/1200)	800/1000/1200
切割高度	20-200mm
升降方式	遥控
发电机功率	2000W
行走速度	5km/h
启动方式	电启动
爬坡角度	≤35°
行走电机功率	850W*2
电压电量	24V
刀片规格	6.5mm定制锰钢锯齿刀
系统/控制器	自发电系统 分控电路控制器
刀具旋转控制	离合式控制
遥控距离	≤1000m
马力	13HP/18HP

Model	RC Brush Mower
Overall Dimension (800/1000/1200)	156*102*97/156*117*98/ 156*102*97
Packing Dimension (800/1000/1200)	163*104*103/163*143*103/ 163*104*103
Net Weight (800/1000/1200)	320kg/348kg/365kg
Gross Weight (800/1000/1200)	350kg/378kg/395kg
Cutting Width (800/1000/1200)	800/1000/1200
Cutting Height	20-200mm
Height Adjustment Mode	Remote Control
Generator Power	2000W
Travel Speed	5km/h
Starting Method	Electric Start
Climbing Angle	≤35°
Travel Motor Power	850W*2
Voltage	24V
Blade Spec	6.5mm custom manganese serrated blades
System/Controller	Self-generating System Separate Circuit Controller
Blade Rotation Control	Clutch Control
Remote Control Range	≤1000m
Horsepower	13HP/18HP